Flow cups for measuring liquid viscosity

CUP Nº 4 STANDARD DIN 53211.
CUPS STANDARD ISO 2431.
CUP FORD STANDARD ASTM D-1200.
CAPACITY: 100ML.

FEATURES

Suitable for measuring kinematic viscosities from 5 to 700 cSt, model dependent.
Metallic cups, chrome finished and calibrated.



Flow cups with handle.
Models DIN 53211 Nº 4
and Ford ASTM D-1200.



Flow cups. Standard models.

ACCESSORY
Support stand with adjustable level.
Part No. 7001021

MODELS

Part No.	Standard	Bore Ø mm	Format	Range cSt	Admisable fall times
1000123	DIN 53211	4	Standard	90 to 700	25” to 100”
1000347	DIN 53211	4	With handle	90 to 700	25” to 100”
1001013	ISO 2431	3	Standard	5 to 42	30” to 100”
1001014	ISO 2431	4	Standard	35 to 135	30” to 100”
1001015	ISO 2431	5	Standard	100 to 350	30” to 100”
1001016	ISO 2431	6	Standard	190 to 680	30” to 100”
1000705	ASTM D-1200	3.40	Standard	40 to 220	20” to 100”
		4.12		70 to 370	20” to 100”
		2.53		25 to 120	20” to 100”
1000707	ASTM D-1200	3.40	With handle	40 to 220	20” to 100”
		4.12		70 to 370	20” to 100”

Comes with a calibration certificate with results traceable to know standards and equipment

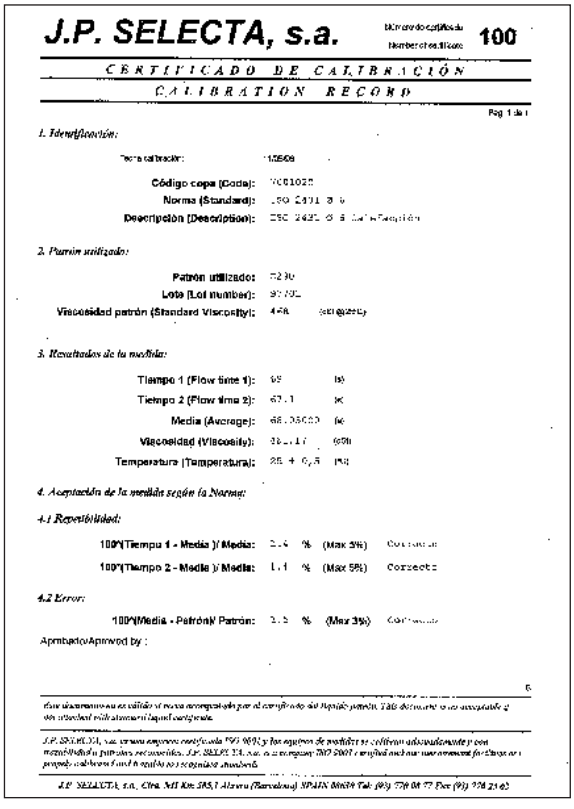

J.P. SELECTA, s.a.

CERTIFICADO DE CALIBRACIÓN
CALIBRATION RECORD